
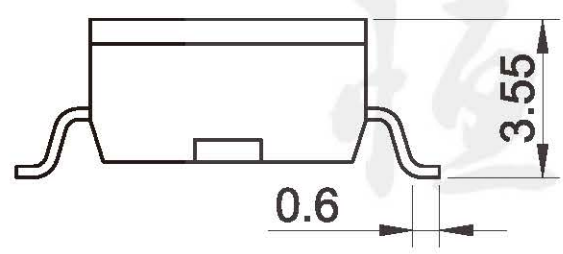
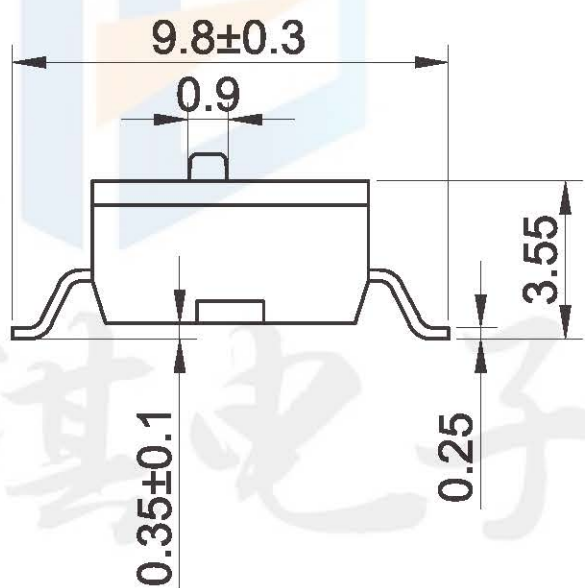
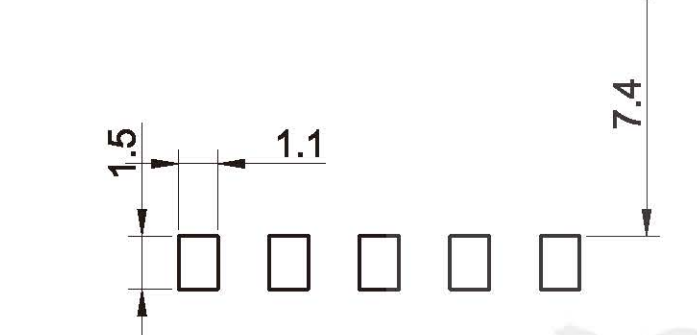
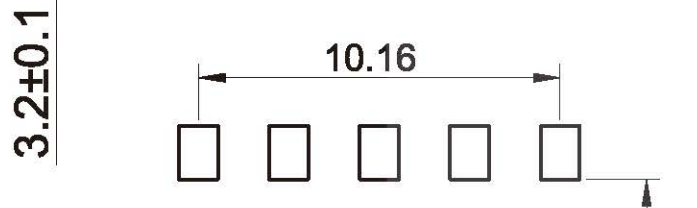
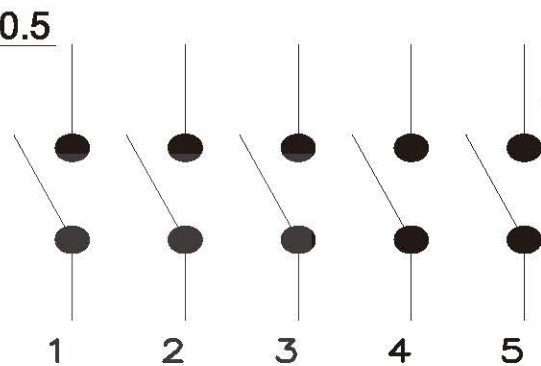


**RoHS**  
COMPLIANT

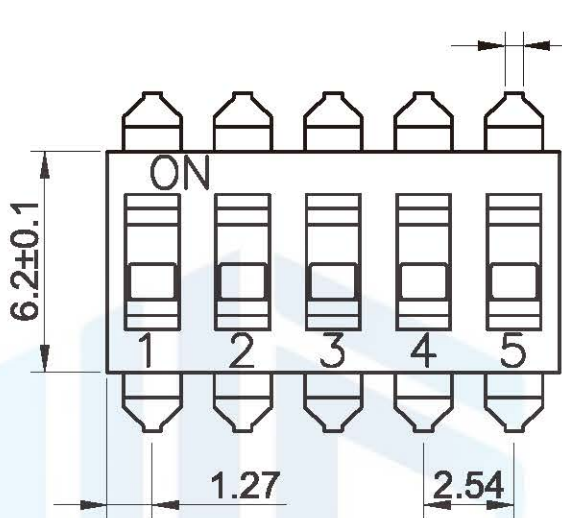

**材料:**

- 开关盖:PPS UL 94-V0
- 开关体:PPS UL94-V0
- 操作杆:PA46 UL94-V0
- 弹片:镀金铍铜
- 端子:镀金黄铜

**规格:**

- 电气寿命: 2000次
- 额定电流:
  - 无切换: 100mA@50VDC;
  - 切换: 25mA @ 24VDC
- 绝缘电阻:100MΩ @ 250VDC
- 接触电阻:50mΩ max
- 绝缘强度:500VAC /1min
- 操作力度:500gf max
- 使用温度:-30℃ to 85℃ (no ice)

设计:	Arvin: 2016.03.08	范围 Range	公差 Tolerance
审核:	Arvin:	X.X ±	X.X ±0.30
校对:	Ru yi:	X.XX ±	X.XX ±0.20
比例:	视角关系:	X.XXX ±	X.XXX ±0.10
版次:	图框大小: A4	Angle ±	Angle ±5°

东莞市恒祺电子科技有限公司

名称: 拨码开关      型号: BIS-05  
料号:  
共 张 , 第 张      备注: